

UL 555S - Classified Motorized Smoke Damper

B-21 Series

Type : Motorized Smoke Damper
Model : MSD-GB-21C2-A/R
Leakage Rating : Class -II
Blade Type : 3V Single Skin; A : Parallel Operation
Construction : Galvanized Steel (GI)

MSD B-21 Series is a high performance UL 555S Classified smoke damper with Class-III leakage rating, installed vertically or horizontally (with blades running horizontally) and is rated for airflow and leakage in either direction.

UL-555S Test Ratings

Leakage Rating : Class - II
 Max Velocity : 2000 fpm
 Max Operating Pressure: 4 in. w.g (1000 pa)
 Operating Temperature : 250°F (121°C) for ½ hr - Class-II
 350°F (176°C) for ½ hr - Class-III

Standard Construction

Frame

16 gauge (1.4 mm - 1.7 mm) thick galvanized steel.

Blades

Parallel operated 3 'V' type blade made of 16 gauge (1.4 mm - 1.7 mm) thick galvanized steel.

Blade Seals

Silicon rubber blade seals.

Jamb Seals

Stainless steel.

Jack Shaft

12 mm diameter Galvanized steel shaft.

Actuator

Honeywell, Belimo, Seimens (24V AC, 120V AC, 230V AC).

Sleeve

Minimum 0.9 mm, single section is field or factory installed.
 Multiple section is factory installed.

Sleeve thickness as per NFPA table 3-4.6.3.

Limit Switches

For BMS open / close indication.

Optional Fittings

Retaining Angles

1½" x 1½" x 16 gauge (40 x 40 x 1.5 mm).

Thermal Response Device (TRD)

165°F.

Indicator

Externally mounted open, close visible Indicator.

Push Button

For manual reset of damper.

Transitions (R)

Neck adapter for round duct connections.

Junction Box

Smoke Detector



MSD-GB-21C2-A

Model : MSD-GB-21C2-A/R UL 555S Damper meets the required standards of SMACNA, NFPA, IBC, BOCA, ICBO, UL.

| MSD - B-21 Series - Model Details | | | | |
|-----------------------------------|----------|-------|------------------|----------|
| | Material | | Damper Operation | |
| | Frame | Blade | Standard | Optional |
| MSD-GB-21C2-A/R | GI | GI | FC | FO |

| Minimum Sleeve thickness for Breakeaway joints as per NFPA 90A Table 3-4.6.3 | | | |
|------------------------------------------------------------------------------|-----------|--------------------------|----|
| Air Duct Diameter or Maximum Width | | Minimum sleeve thickness | |
| Inch | mm | Inch | mm |
| 12 or Less | 305 | 0.018 | 26 |
| 13-30 | 330-762 | 0.024 | 24 |
| 31-54 | 787-1372 | 0.03 | 22 |
| 55-84 | 1397-2134 | 0.036 | 20 |
| 85 or more | 2159 | 0.047 | 18 |

| Actuator Location | | Operating Voltage | |
|-------------------|------------|-------------------|--------------|
| Standard | Optional | Standard | Optional |
| Left Side | Right side | 230 V | 120 V / 24 V |

Actuator location standard: Left side from rear view
 (Jack shaft view)

Note :

FC : Fail Close in the event of Fire

FO : Fail Open in the event of Fire

* The temperature ratings are for Honeywell 20 Nm actuators with thermal enclosures.

Optional Construction (UL Certification N/A)

Frame : Stainless Steel 16 gauge (304/316L)

Blade : Stainless Steel 16 gauge (304/316L)

Selected Products of the company have been Classified / Listed / Tested by various international testing authorities.



UL 555S - Classified Motorized Smoke Damper

B-21 Series

Type : Motorized Smoke Damper

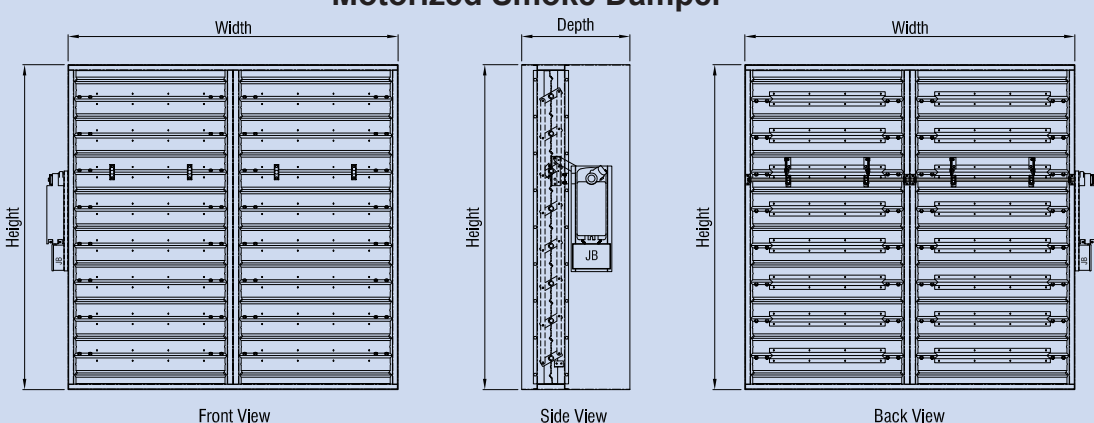
Model : MSD-GB-21C2-A/R

Leakage Rating : Class -II

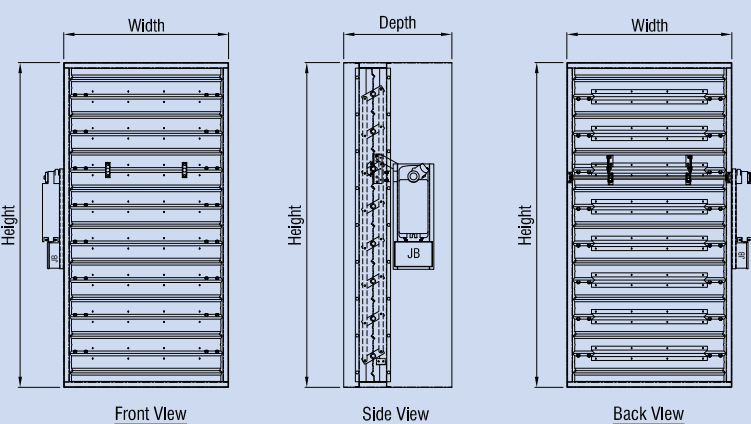

Blade Type : 3V Single Skin; A : Parallel Operation

Construction : Galvanized Steel (GI)

Motorized Smoke Damper



| Module | Size (WxH) | Actuator Options |
|----------|------------|---------------------|
| Single | 24" x 48" | Honeywell 9 / 20 Nm |
| | | Belimo 7.9 Nm |
| | | Siemens 16 Nm |
| Single | 36" x 48" | Honeywell 20 Nm |
| Single | 48" x 48" | Honeywell 20 Nm |
| Multiple | 96" x 48" | Siemens 16 Nm |
| | | Belimo 7.9 Nm |
| Multiple | 144" x 96" | Honeywell 9 / 20 Nm |
| Multiple | 288" x 48" | Honeywell 20 Nm |

UL Classified (see mark on product)
 UL Classified to American/Intl safety standards
 UL Standard 555 (Listing # R21925)

| Size Limitation | | |
|-----------------|------------------------------------------------|-------------------|
| Module | Size : Width X Height | Mounting Position |
| Single | Min X Min. 6" x 9" | V/H |
| Single | Max X Max. 24" x 48" | V/H |
| Multiple | Max X Max. 48" x 48" | V/H |
| Multiple | Max X Max. 144" x 96" Max X Max. 288" x 48" | V/H |

| Standard Sizes Any Combination of W x H | | | |
|--------------------------------------------|------------|-----------|-----------------|
| Width (W) | Height (H) | Depth (D) | Module |
| 6" | 9" | 16" | Single |
| 8" | 9" | 16" | Single |
| 10" | 10" | 16" | Single |
| 12" | 12" | 16" | Single |
| 16" | 16" | 16" | Single |
| 20" | 20" | 16" | Single |
| 24" | 24" | 16" | Single |
| 24" | 48" | 16" | Single |
| 48" | 48" | 16" | Single/Multiple |
| 144" | 96" | 16" | Multiple |

Selected Products of the company have been Classified / Listed / Tested by various international testing authorities.